

GV-AS1620 Single Door IP Controller



Introduction

GV-AS1620 is a single door controller with three types of interfaces, Wiegand, RS-485 and TCP/IP, to accommodate various readers for entry and exit management. Through its I/O pins, not only does it provide basic door operations but also alarm, tamper and fire sensor applications, as well as allowing LEDs connected to indicate an access granted and denied.

Key Features

- One door IP controller (entry and exit)
- 3 types of interfaces, Wiegand, RS-485 and TCP/IP, supporting 2 readers for each interface
- RS-485 / OSDP communication
- 4 digital inputs for door contact, exit button, fire contact and tamper contact
- 4 relay outputs for lock, alarm, 2 LED for an access granted and access denied
- DC 12V, 3A / PoE+ (IEEE 802.3at)
- Stores up to 100,000 cards
- Suitable for door, parking lot and elevator controls
- ONVIF (Profile C) conformant

Specifications


System Requirements		
GV-ASManager Version	V5.2.0 or later	
Hardware		
Number of User Cards	100,000 cards	
Event Buffer	65,535 events and log data	
Wiegand Interface	2 Wiegand interfaces, 26 ~ 64-bit format	
	12V DC power supply, 200 mA	
RS-485 Interface	1 RS-485 interface for max. 2 RS-485 / OSDP readers	
	RJ-45, 10 / 100 Mbps	
TCP/IP Interface	1 TCP/IP interface for max. 2 GV-Readers (GV-CR420 / GV-FR2020 / GV-CR1320 / GV-GF1921 / GV-GF1922; GV-FWC with GV-FD8700-FR / GV-VD8700)	
Digital I/O	Input	4 inputs, Dry Contact, NO / NC
	Output	4 relay outputs (DC 30V, 3A; 110V AC ~ 250V AC, 3A), NO / NC
Power	12V DC, 3A / PoE+ (IEEE 802.3at, provides up to 25.5W)	
Operating Temperature	0°C ~ 65°C / 32°F ~ 149°F	
Operating Humidity	5% ~ 95% RH (Non-Condensing)	
Dimensions	111.4 x 27.5 x 101 mm / 4.39 x 1.08 x 3.98 in (case included)	
Weight	235 g / 0.52 lb (case included)	
Ingress Protection	IP54	

Regulatory	CE, FCC, RoHS compliant
Network	
Interface	10/100 Ethernet
Protocol	DHCP, DynDNS, HTTPS, TCP, ONVIF (Profile C)

Note:

1. GV-AS1620 supports either RS-485 or OSDP communication, but not both at the same time.
2. RS-485 and network communications only support GeoVision readers, while Wiegand and OSDP are compatible with third-party readers.
3. All specifications are subject to change without notice.

Overview

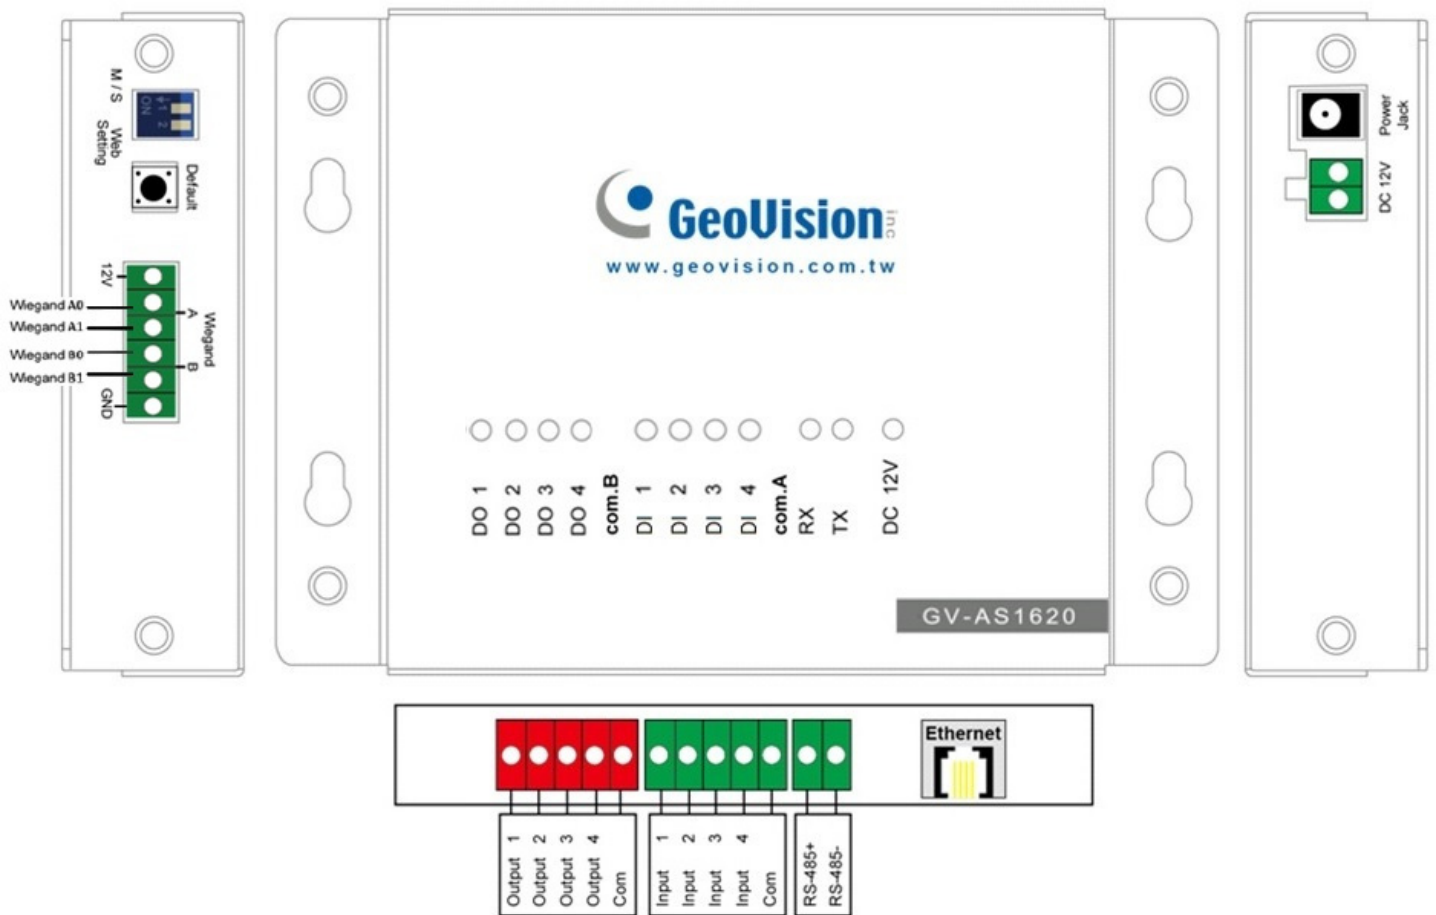

Pin	Definition	Pin	Definition	Pin	Definition
DO 1	Lock	DI 1	Door Contact	Wiegand A	Entry Reader
DO 2	Alarm	DI 2	Exit Button	Wiegand B	Exit Reader
DO 3	LED / Beeper for Access Granted	DI 3	Fire Contact	RS-485 +/-	RS-485 / OSDP Reader
DO 4	LED / Beeper for Access Denied	DI 4	Tamper Contact		

Packing List

- GV-AS1620
- Warranty Card
- Download Guide

Options

Optional devices can expand the capabilities and versatilities of your GV-AS1620. Consult your sales representative for more information.

GV-AS ID Card / Key Fob & GV-UHF Tag	125 KHz and 13.56 MHz cards / key fobs, 900 MHz UHF Tag are available.
GV-CR420	GV-CR420 is a card reader with a built-in 4MP wide angle IP camera. The card reader recognizes identification cards and transmits live view through network connection.
GV-CR1320	GV-CR1320 is a card reader with a built-in 2MP wide angle IP camera. The card reader recognizes identification cards and transmits live view through network connection.
GV-DFR1352	GV-DFR1352 is a card reader that uses a 13.56 MHz frequency. The reader has both Wiegand and RS-485 outputs that can be connected to any standard access control panel.
GV-FWC	GV-FWC integrates GeoVision face-recognition-based cameras, software and readers into access control systems by sending access card data, paired to Face IDs, to controllers either through TCP/IP or Wiegand connection.
GV-FR2020	GV-FR2020 is a 13.56 MHz face recognition reader. The reader supports various credentials for access control: Face, Card, Card + Face and Password + Face.
GV-GF Fingerprint Readers	GV-GF1921 / 1922 is a fingerprint reader, supporting three operation modes: Fingerprint Only, Fingerprint + Card and Card Only. Readers with optical and capacitance sensors are available.
GV-IB25 / 65 / 85 Infrared Button	The GV-IB25 / 65 / 85 Infrared Button detects infrared movement within 3 to 12 cm and allows you to open the door with a wave of hand.
GV-POE Switch	GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.
GV-Reader 1251	GV-Reader 1251 is a card reader that uses a 125 kHz frequency. The reader has both Wiegand and RS-485 outputs that can be connected to any standard access control panel.
GV-R1352	GV-R1352 is a card reader that uses a 13.56 MHz frequency. The reader has both Wiegand and RS-485 outputs that can be connected to any standard access control panel.
GV-RK1352	GV-RK1352 is a card reader with keypad that uses a 13.56 MHz frequency. The reader has both Wiegand and RS-485 outputs that can be connected to any standard access control panel.
GV-RU9003	GV-RU9003 is a Radio Frequency Identification (RFID) reader of ISO 18000-6C (EPC GEN2) standard. Designed for parking lot management, the reader can read RFID tag within 10 m (32.8 ft).
GV-SR1251	GV-SR1251 is a card reader that uses a 125 kHz frequency. It has both Wiegand and RS-485 outputs that can be connected to any standard access control panel.
GV-WTR	GV-WTR is a converter designed for converting Wiegand interface to RS-485 interface, and vice versa. It enables 3rd party readers to be connected to RS-485 GV-Controllers, as well as allowing GV-AI FR (software) and GV-RS1320 (RS-485 camera reader) to be connected to 3 rd -party Wiegand controllers.
Electric Lock	Three types of electric locks are available: electromagnetic lock, electric bolt and electric strike.
Power Adapter	Contact our sales representatives for the countries and areas supported.
Push Button Switch	The push button switch can be integrated with any standard access control systems, allowing door exit by activating or deactivating the electric locking device. Both American standard and European standard push buttons are available.