

DATA SHEET

3-Tone Fire Alarm Siren 105dB with flasher

Part Number

FAE050032



OVERVIEW

Conventional audible and visual alarm indicator adopts a built-in integrated circuit, a piezoelectric sounder and a high intensity strobe which when combined, produces a high energy conversion efficiency for effective output of light and sound while utilizing a minimum amount of power.

KEY FEATURES


- Designed for indoor use
- Easy to wire and install
- Quick response time
- 3 user selectable tones via jumpers

TECHNICAL SPECIFICATION

Product Name	Wired Fire Alarm Strobe Sounder
Operating Voltage	24 VDC
Working Current	80-120 mA
Sound Pressure	105 dB
Audio source	3 tones
Light flash cycle	1.5 sec
Working Temperature	-10 °C – 50 °C
Installation way	Wall Hanging
Operating humidity	95% RH
Storage Temperature	-20 °C – 60 °C
Color	Red



DIMENSIONS

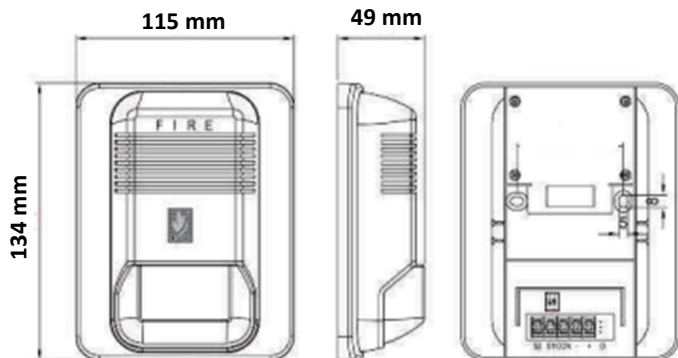

CONNECTIONS

