




Voice Evacuation Microphone

VA-6ZRM

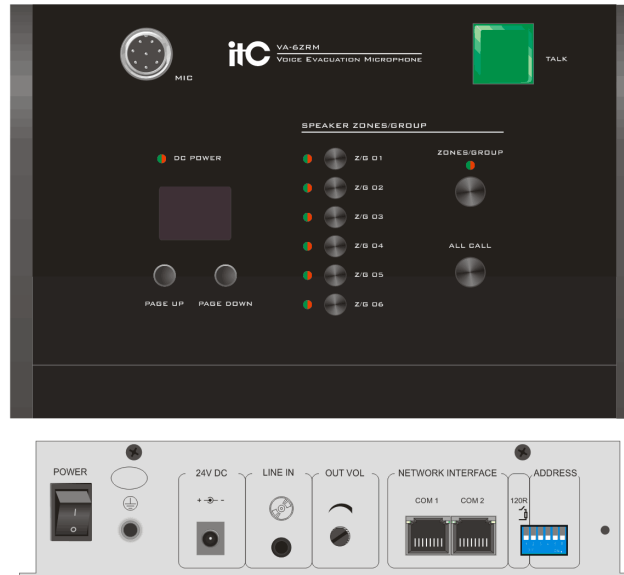

Features

- * Support 40 zones, 6 group button paging.
- * Support zone configuration to any grouping.
- * Support consecutive paging for any controller of 1 ~ 6 zones.
- * Support line input / microphone output. And output volume is adjustable.
- * Remote microphone paging priority can be configured.
- * Display the zone status of the associated controller in real time.
- * Support 24 DC power supply, POE power supply.
- * The system supports up to 28 remote microphones.

Performance index

Analog audio

MIC microphone input

Sensitivity	10MV±1mV
Frequency response	200Hz~10kHz
Input impedance	≥1kΩ

LINE unbalanced line audio input

Sensitivity	775MV±50mV
Frequency response	80Hz~16kHz
Impedance	≥10kΩ

Balanced line output

IAmplitude	1000MV±50mV
IDistortion	<0.3%, 1 kHz
IFrequency response	200Hz~10kHz
IOutput impedance	470Ω
ISNR	>60dB

Communication

CAN interface

IRemote MIC console CAN interface	
IBaud rate	100Kbps
ISupport up to	32 remote MIC consoles

Mechanical indicators

Size (L × W × H)	197 * 115 * 44 mm
Net weight	About 1.2KG
Installation	Desktop or 19-inch cabinet
Color	Black

Environmental requirements

IOperating temperature	+5°C ~ +40°C
IStorage temperature	-20 ° C ~ +70 ° C
IRelative temperature	<95%