



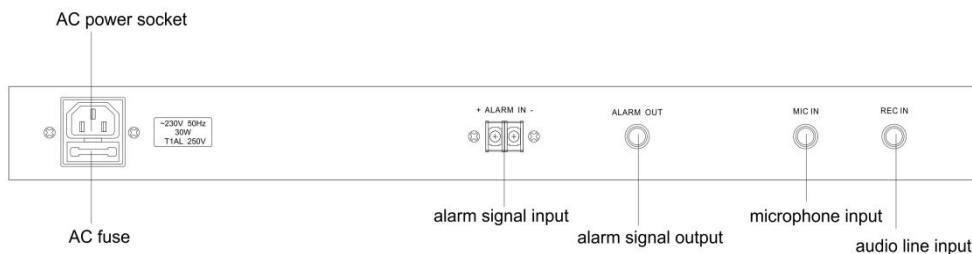

Voice Alarm and Recorder Controller

T-6203

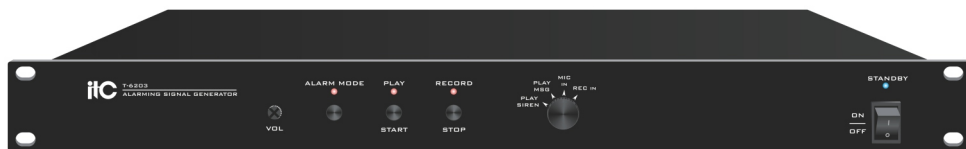

Description:

- * Equipment that receives short circuit trigger signal and plays alarm voice.
- * It is suitable for the broadcast system requiring fire alarm linkage.

Features:

- * Standard cabinet design (1U).
- * 2 alarm modes: Siren or pre-recorded voice alarm.
- * 2 emergency alarm modes are optional: stop the alarm immediately when the alarm short-circuit trigger is cancelled; after the alarm short-circuit trigger is cancelled, the alarm sound will play circularly (you need to manually press the stop key to cancel the alarm).
- * 3 alarm audio storage modes: 1 microphone recording input circuit; 1 recording input circuit; in addition, there is built-in alarm audio.
- * Built-in recorder which can record 2 ~3 minutes voice message.

Specifications:

Model	T-6203
Indicators	Power indicator/Alarm status indicator
Power Supply	~110V-230V 50/60Hz
Power Consumption	30W
Dimension	484 x 209 x 44mm
Weight	2.30Kg