

Tiandy



TC-C34UV Spec:W/E/Y/M/S/4mm

4MP Fixed Color Maker Bullet Camera

Lite Series



KEY FEATURES

- Metal Housing
- Up to 2688x1520@30fps
- S+265/H.265/H.264
- Min. illumination Color: 0.0001Lux@F1.0
- 120dB WDR
- 4 Warmlights, 15m
- Support tripwire and perimeter
- Support human and vehicle classification
- Built-in Mic, support max 512G Micro SD Card
- Operating Conditions -40°C~65°C, 0~95% RH
- POE,DC12V
- IP67



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048


Tiandy

Camera	
Image Sensor	1/1.8"CMOS
Min. Illumination	Color:0.0001Lux@(F1.0,AGC ON),B/W:0Lux with IR
Shutter Time	1s-1/100000s
WDR	120dB
S/N	>42dB
Angle Adjustment	0-360°;0-90°;0-360°
Lens	
Lens Type	Fixed
Focal Length	4mm
Lens Mount	M16
Aperture Range	F1.0,Fixed
Field of View	94.5°(H);50.2°(V);110.2°(D)
DORI Distance	Detect:80m Observe:31.7m Recognize:16m Identify:8m
Illuminator	
White LEDs	4
Whitelight Distance	15m
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Video Bit Rate	32k-16Mbps
Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
Audio Sampling Rate	8kHz/32kHz/48kHz
Image	
Max. Resolution	2688x1520@30fps
Main Stream	PAL:25fps(2688x1520,2560x1440,2304x1296) 50fps(1920x1080,1280x720) NTSC:30fps(2688x1520,2560x1440,2304x1296) 60fps(1920x1080,1280x720)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360) NTSC:30fps(704x480,704x240,352x240,640x360)
Third Stream	PAL:25fps(1280x720,704x576,704x288,352x288) NTSC:30fps(1280x720,704x480,704x240,352x240)
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-auto/Manual/Sunny/Natural light/Warm light/Sodium lamp/Incandescent lamp/Locked white balance
ROI	8 regions
Corridor mode	Yes
EIS	N/A
OSD	5 regions; 16*16/32*32/48*48/64*64/96*96
Picture Overlay	1 region; 200*200 BMP 24bits
Privacy Mask	4 regions
Defog	Yes

Tiandy

Feature	
Alarm Trigger	Motion Detection;Mask Alarm;Voltage Alarm;Disk Full;Disk R/W Error;IP Address Conflict;MAC Address Conflict;FTP Server Exception
Video Analytics	Human/Vehicle Classification;Tripwire;Perimeter
Rules of behavior analyse in 1 scene	7
Early Warning(EW)	N/A
Linkage Method	send emailtrigger recording;trigger capture;notify surveillance center
Network	
ANR	ANR
Protocols	HTTP;HTTPS;TCP/IP;UDP;UPnP;ICMP;IGMP;N/A;SNMP;DHCP;DNS;DDNS;Easy DDNS;NTP;SMTP;SSL;802.1X;QoS;IPv4;IPv6;N/A;PPPOE;N/A;SSH;Unicast;Multicast;R TCP;ARP;RTP;SRTP;RTSP;FTP;SFTP;NAS
System Compatibility	onvif Profile S/T/G/M;CGI;MILSTONE;RTMP
Remote Connection	≤2
Client	Easy7 Smart Client
Moblie Client	EasyLive Plus
Web	IE10+;Firefox52+;Edge89+;Safari11+;Chrome57+
Interface	
Communication Interface	1RJ45,10M/100M self adaptive Ethernet port
Audio I/O	N/A
Alarm I/O	N/A
Built-In Mic	Yes
Built-In Speaker	N/A
Reset Button	Yes
On-board storage	Built-in Micro SD card slot, up to 512GB
General	
Web Client Language	19languages Simple Chinese/TraditionalChinese/English/Spanish/Korean/Italian/Turkish/Russian/Thai/French/Polish/Dutch /Hebrew/Arabic/Vietnamese/German/Ukrainian/Portuguese/Albanian
Operating Temperature	-40°C-65°C
Operating Humidity	0-95%(non-condensing)
Storage Temperature	-40°C-65°C
Storage Humidity	0-95%(non-condensing)
Power Supply	DC12V±25%,MAX 8.5W;POE 802.3at,MAX 9.5W
Protection	Surge protection 2000V;Lightning proof 6000V;IP67;N/A
Boundary Dimensions	239(L)90(W)90(H)mm
Package Dimensions	280(L)125(W)140(H)mm
GrossWeight	1.28kg
NetWeight	0.92kg

DIMENSIONS (Unit: mm)

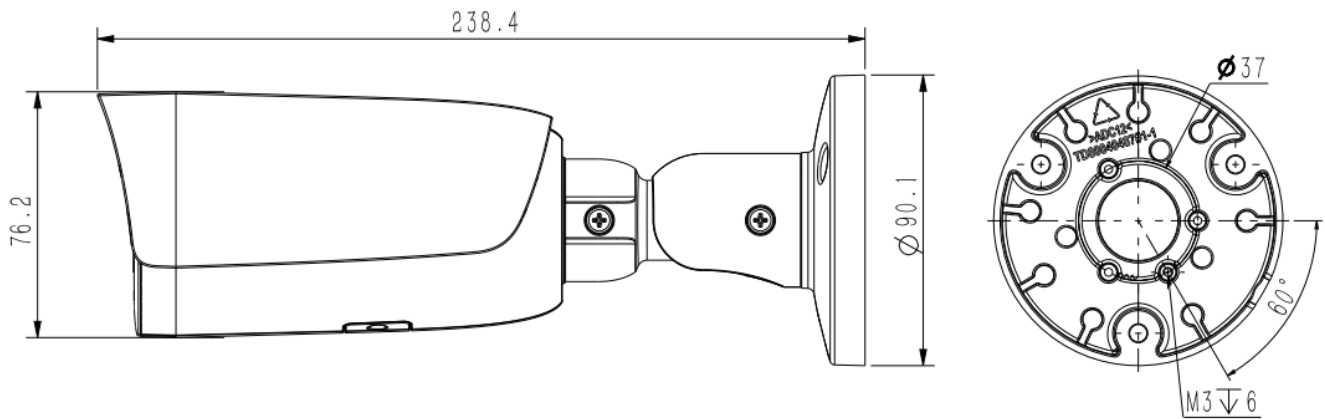

ACCESSORIES



A36



TC-P54BM SpecV5